

systemtronic datasheet S09M





General description

Metal keyboard tray, laminated and cold drawn. Removable by metal guides with ball bearing and brake with self-locking. The subjection to the board is done by two pairs of brackets that are screwed to the board. The depth adjustment is 50 mm. The tray is coated with epoxy paint pigmented at 185°C.

Technical description


Material: 1mm thick cold rolled metal.

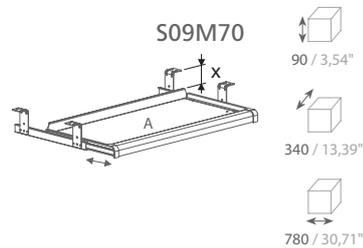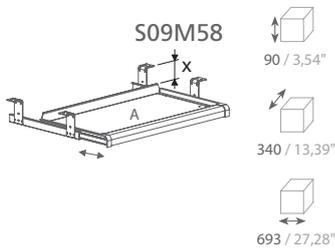

surface (mm)	height (mm)	maximum load (kg)
Useful surface = 586x288 Total = 693x340	A: Posición 1 = 46 A: Posición 2 = 72	4
Light gap (X): Position 1 = 10 mm Position 2 = 36 mm		

surface (mm)	height (mm)	maximum load (kg)
Useful surface = 673x288 Total = 780x340	A: Posición 1 = 46 A: Posición 2 = 72	4
Light gap (X): Position 1 = 10 mm Position 2 = 36 mm		

SI units: mm and inches

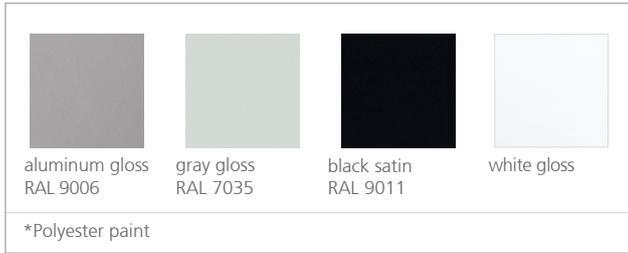Finishes:

Consult for special dimensions or any other modification.

Maintenance:-Polyester Paint:

For dry dirt (dust), use a damp cloth. For greasy/oily stains (fingerprints), wipe with a sponge with water and dishwashing liquid. Rinse with a damp cloth. Avoid using products containing solvents and/or pure ethyl alcohol.

-Aluminium-metal-glass-melamine-plastic:

We recommend using normal cleaning products for delicate surfaces. Alcohol, solvents and abrasive agents must be avoided.

Sustainability:

Manufacturing materials are 100 % recyclable. The used paints do not contain solvents, do not consume water and do not generate emissions or waste. The result is a lower environmental impact.